

IZJAVA O SVOJSTVIMADoP Br. **MKT-1.5-200_hr**

- ❖ **Jedinstvena identifikacijska oznaka vrste proizvoda:** **Stropni čavao DN**
- ❖ **Namjena/namjene:** Tipli za sidrenje u betonu za suvišne neopterećene sustave, vidi Prilog/Annex B
- ❖ **Proizvođač:** MKT Metall-Kunststoff-Technik GmbH & Co.KG
Auf dem Immel 2
67685 Weilerbach
- ❖ **Sustav/sustavi za ocjenu i provjeru stalnosti svojstava (AVCP):** 2+
- ❖ **Europski dokument za ocjenjivanje:** **EAD 330747-00-0601**
Europska tehnička ocjena: **ETA-23/0246, 04.07.2023**
Tijelo za tehničko ocjenjivanje: DIBt, Berlin
Prijavljeno tijelo/prijavljena tijela: NB 2323 – IEA GmbH & Co.KG, Stuttgart

❖ **Objavljena svojstva:**

Bitnih značajka	Svojstva
Sigurnost u slučaju požara (BWR 2)	
Ponašanje požara	Klasa A1
Otpornost na vatru	Prilog/Annex C1
Sigurnost tijekom uporabe (BWR 4)	
Karakteristična otpornost za sve smjerove opterećenja i sve načine otkaza za pojednostavljenu metodu dizajna	Prilog/Annex C1
Trajnost	Prilog/Annex B1

Prije utvrđeno svojstvo proizvoda u skladu je s objavljenim svojstvima. Ova izjava o svojstvima izdaje se, u skladu s Uredbom (EU) br. 305/2011, pod isključivom odgovornošću prethodno utvrđenog proizvođača.

Za proizvođača i u njegovo ime potpisao:



Stefan Weustenhagen
(generalni direktor)
Weilerbach, 04.07.2023

p.p.



Dipl.-Ing. Detlef Bigalke
(Voditelj razvoja proizvoda)



Izvornik ove izjave o izvedbi pisan je na njemačkom jeziku. U slučaju odstupanja u prijevodu vrijedi njemačka verzija.

Specifications of intended use

Ceiling Anchor	DN 6x40	DN 6x70
Use only for redundant non-structural systems acc. to EN 1992-4:2018		
Static and quasi-static actions	✓	
Fire exposure	R30 to R120	
Base materials	compacted, reinforced or unreinforced normal weight concrete without fibres acc. to EN 206:2013 + A1:2016	
Strength classes	C20/25 to C50/60 acc. to EN 206:2013 + A1:2016	
Cracked and uncracked concrete	✓	

Use conditions (Environmental conditions):

- Structures subject to dry internal conditions

Design:

- Anchorages are designed under the responsibility of an engineer experienced in anchorages and concrete work
- Verifiable calculation notes and drawings are prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e.g. position of the anchor relative to reinforcement or to supports, etc.)
- Anchorages are designed according to EN 1992-4:2018, Annex G, Method C

Installation:


- Hole drilling by hammer drill bit or hollow drill bit
- Anchor installation carried out by appropriately qualified personal and under supervision of the person responsible for technical matters of the site
- Positioning of the drill holes without damaging the reinforcement
- Overhead installation is permitted

Ceiling Anchor DN	Annex B1
Intended use Specifications	


Table B1: Installation parameters

Ceiling Anchor			DN 6x40	DN 6x70
Nominal drill hole diameter	d_0	[mm]	6,0	
Cutting diameter of drill bit	$d_{cut} \leq$	[mm]	6,4	
Depth of drill hole	$h_0 \geq$	[mm]	40	
Effective anchorage depth	$h_{ef} \geq$	[mm]	32	
Diameter of clearance hole in the fixture	$d_f \leq$	[mm]	7	
Thickness of fixture	$t_{fix} \leq$	[mm]	5	35
Minimum thickness of member	h_{min}	[mm]	80	
Minimum edge distance	c_{min}	[mm]	150	
Minimum spacing	s_{min}	[mm]	200	

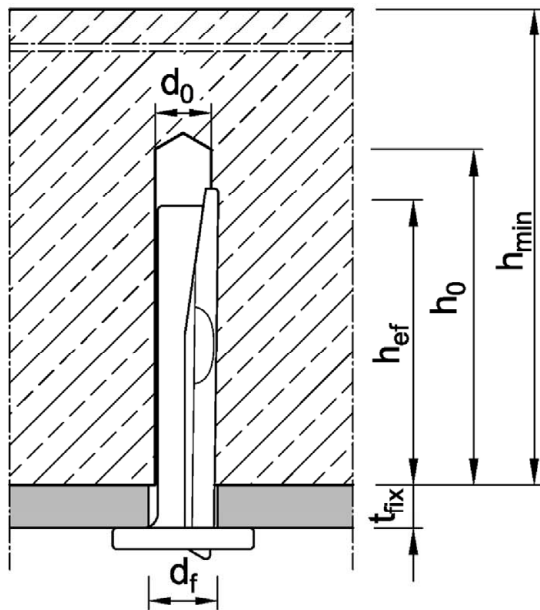DN 6x40



DN 6x70




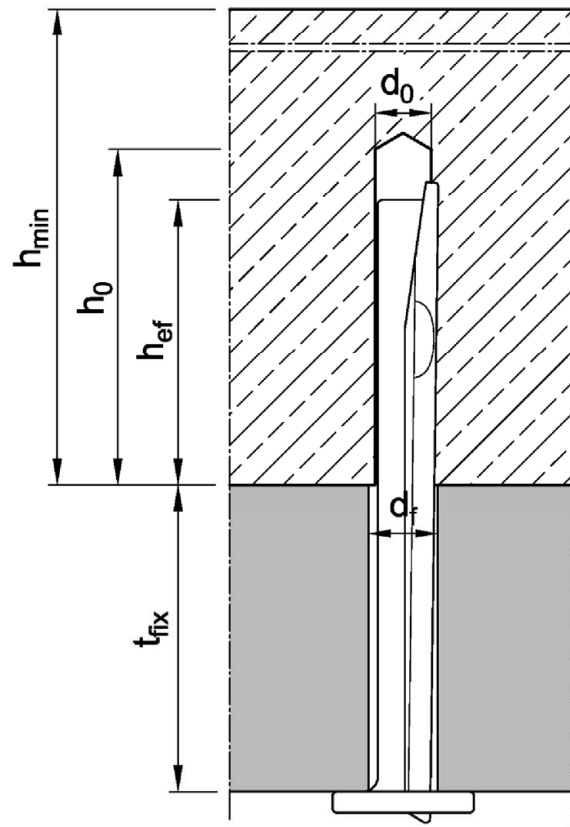


Ceiling Anchor DN

Intended use
Installation parameters

Annex B2

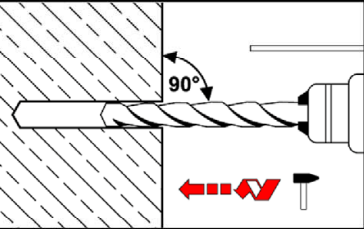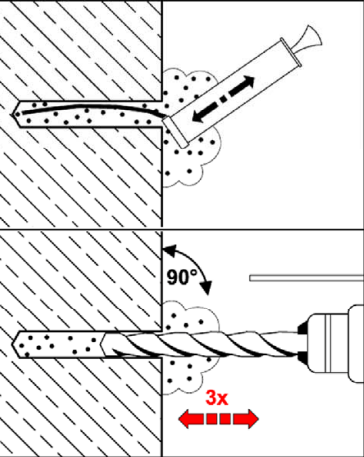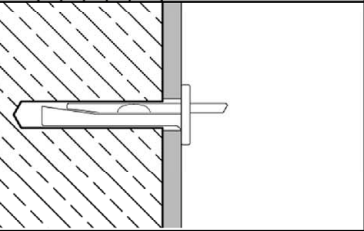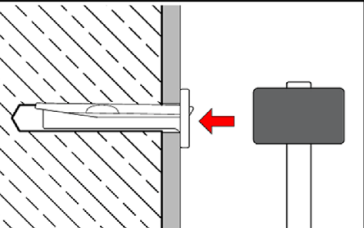Installation instructions

1		<p>Drill hole perpendicular to concrete surface.</p>
2		<p>Blow out dust. Alternatively, vacuum clean down to the bottom of the hole.</p> <p>or</p> <p>When reaching the drill hole depth pull out the drill bit whilst power drill is switched on. To reduce the drill dust in the drill hole repeat this step minimum three times, starting from the bottom of the borehole (discharging the drill hole).</p>
3		<p>Insert Ceiling Anchor up to attachment contact.</p>
4		<p>Drive in the protruding pin.</p>

<p>Ceiling Anchor DN</p>	<p>Annex B3</p>
<p>Intended use Installation instructions</p>	

Table C1: Characteristic values for all load directions and failure modes

Ceiling Anchor			DN 6x40	DN 6x70
Installation factor	γ_{inst}	[-]	1,0	
All load directions and for all failures				
Characteristic resistance in cracked and uncracked concrete C20/25 to C50/60	F_{Rk}	[kN]	5,0	
Partial factor ¹⁾	γ_M	[-]	1,5	
Minimum edge distance	$c_{cr} = c_{min}$	[mm]	150	
Minimum spacing	$s_{cr} = s_{min}$	[mm]	200	
Steel failure with lever arm				
Characteristic bending resistance	$M^0_{Rk,s}$	[Nm]	5,1	
Partial factor ¹⁾	γ_{Ms}	[-]	1,25	

¹⁾ In absence of other national regulations

Table C2: Characteristic values under fire exposure

Ceiling Anchor			DN 6x40	DN 6x70	
all load directions					
Fire resistance class	R30	Characteristic resistance	$F_{Rk,fi}$	[kN]	0,74
	R60		$F_{Rk,fi}$	[kN]	0,61
	R90		$F_{Rk,fi}$	[kN]	0,49
	R120		$F_{Rk,fi}$	[kN]	0,42
Steel failure with lever arm					
Fire resistance class	R30	Characteristic bending resistance	$M^0_{Rk,s,fi}$	[Nm]	0,39
	R60		$M^0_{Rk,s,fi}$	[Nm]	0,33
	R90		$M^0_{Rk,s,fi}$	[Nm]	0,26
	R120		$M^0_{Rk,s,fi}$	[Nm]	0,23
Edge distance and spacing, partial factor					
Fire resistance class	R30 to R120	Partial factor	$\gamma_{M,fi}$	[-]	1,0
		Spacing	$s_{cr,fi}$	[mm]	200
		Edge distance	$c_{cr,fi}$	[mm]	150
For fire exposure from more than one side $c \geq 300mm$.					

Ceiling Anchor DN

Performance
Characteristic resistance

Annex C1